



PERMALOC ALUMINUM EDGING, 13505 BARRY STREET HOLLAND, MI, 49424  
 (800) 356-9660 PHONE: (616) 399-9600 fax: (616) 399-9770 WWW.PERMALOC.COM


ARCHITECT NOTE: CHECK OFF APPLICABLE SIZE & FINISH DESIRED

SIZE: ALL 8' (2.44 M) LENGTHS w/ 0.210" (5.33 MM)  
 THICK EXPOSED TOP LIP

- |                          |      |         |         |          |                          |    |                          |    |
|--------------------------|------|---------|---------|----------|--------------------------|----|--------------------------|----|
| <input type="checkbox"/> | 2"   | X 2.25" | (51 MM  | X 57 MM) | <input type="checkbox"/> | MF | <input type="checkbox"/> | BL |
| <input type="checkbox"/> | 2.5" | X 2.25" | (64 MM  | X 57 MM) | <input type="checkbox"/> | MF | <input type="checkbox"/> | BL |
| <input type="checkbox"/> | 3"   | X 3"    | (76 MM  | X 76 MM) | <input type="checkbox"/> | MF | <input type="checkbox"/> | BL |
| <input type="checkbox"/> | 4"   | X 3"    | (102 MM | X 76 MM) | <input type="checkbox"/> | MF | <input type="checkbox"/> | BL |



**FINISH LEGEND:**

(MF) MILL FINISH-NATURAL ALUMINUM  
 (BL) BLACK DURAFLEX-ELECTROSTATICALLY  
 APPLIED BAKED ON PAINT, MEETS AAMA 2603

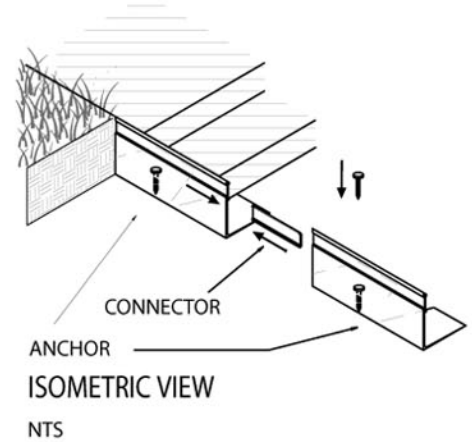

**NOTES:**

- INSTALLATION PER MANUFACTURER'S "INSTALLATION GUIDELINES"
- 8'-0" (2.44 M) SECTIONS CONNECTED WITH 4" (102 MM) SLIDING CONNECTOR.
- MAINTAIN 3/8" (9.5 MM) GAP BETWEEN SECTIONS TO ALLOW FOR PRODUCT EXPANSION IN EXTREME TEMPERATURES.
- CORNERS: NOTCH BASE ONLY AND FORM A CONTINUOUS CORNER.
- PERMALOC ASPHALTEGE AS MANUFACTURED BY PERMALOC CORPORATION, HOLLAND MI. (800) 356-9660, (616) 399-9600
- CONTRACTOR'S NOTE: FOR PRODUCT AND PURCHASING INFORMATION VISIT: WWW.PERMALOC.COM

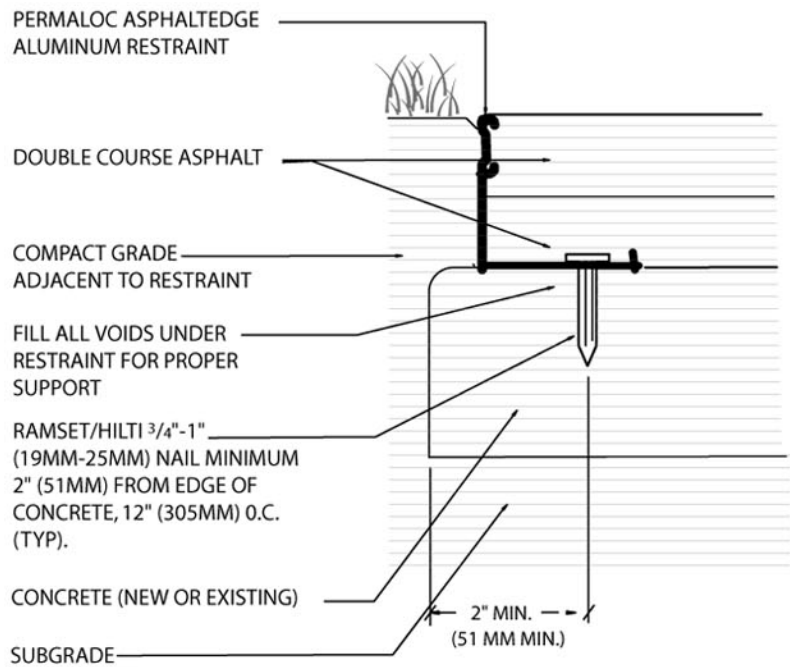

**DOUBLE COURSE ASPHALT AND RESTRAINT OVER CONCRETE**

SCALE: 3"=1'-0"